



# SEKONIC L-358

Incident Meter: measures light falling on lumi-sphere globe  
frame rate (f/s): 24

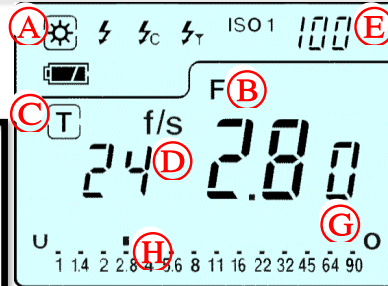

BUTTON / DISPLAY	
① POWER	
② MODE	set to Cine
③ ISO 1	default ISO
④ Jog Wheel	toggle settings
⑤ MEASURE	measure light
⑥ Lumni-Sphere	extend/retract
Ⓐ AMBIENT light	
Ⓑ F-stop (priority)	NOT boxed
Ⓒ Shutter (priority)	NOT visible
Ⓓ Frame Rate	24 f/s
Ⓔ ISO	user set ISO value
Ⓕ F-stop (measured)	measured
Ⓖ 10 <sup>th</sup> stop	10 <sup>th</sup> stop increment
Ⓗ F-stop (scale)	measured

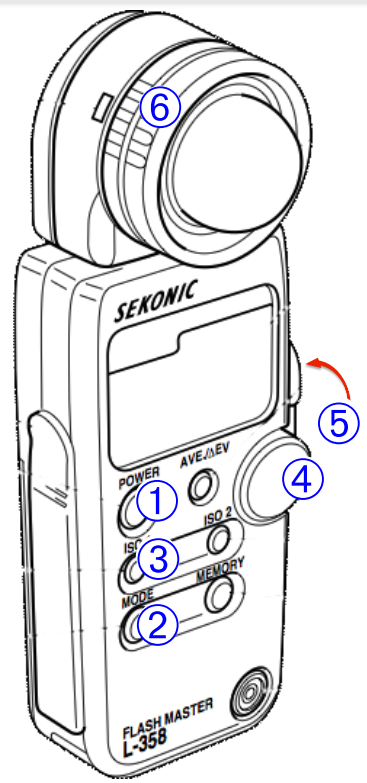

**OPERATION CONFIGURE**


- POWER on ① ▶ press/hold POWER off
- SET Cine Mode
  - ▶ press/hold MODE ② ▶ rotate Jog Wheel ④
  - ▶ boxed ambient icon Ⓐ · "F" **NOT** boxed Ⓑ
- SET frame rate f/s 24
  - ▶ rotate Jog Wheel ④
  - if boxed "T" Ⓒ visible, rotate Jog Wheel ④ Counter-Clockwise
- SET desired ISO
  - ▶ press/hold ISO 1 ③ ▶ rotate Jog Wheel ④

**MEASURE LIGHT**


- EXTEND lumi-sphere globe ⑥
- PRESS ⑤
- aperture F-stop for NORMAL\* exposure
  - ▶ F-stop Ⓕ measured in 1/10 increments Ⓖ

# SEKONIC L-758c

Incident Meter: measure light falling on lumi-sphere globe  
Reflective Meter: measure light reflected off subject  
Shutter: 180°  
Frame Rate (f/s): 24

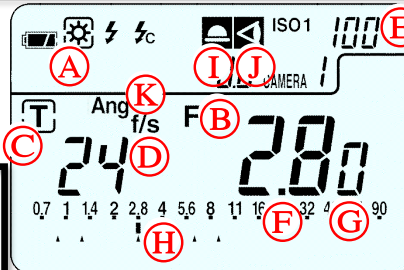

BUTTON / DISPLAY	
① POWER	
② MODE	set to Cine
③ ISO 1	default ISO
④ Jog Wheel	toggle settings
⑤ MEASURE	measure light
⑥ Lumni-Sphere	extend/retract
⑦ METER	incident/reflective
⑧ M.CLEAR	clear memory
Ⓐ AMBIENT light	
Ⓑ F-stop (priority)	NOT boxed
Ⓒ Shutter (priority)	NOT visible
Ⓓ Frame Rate	24 f/s
Ⓔ ISO	user set ISO value
Ⓕ F-stop (measured)	measured
Ⓖ 10 <sup>th</sup> stop	10 <sup>th</sup> stop increment
Ⓗ F-stop (scale)	measured
Ⓘ INCIDENT	user selected meter
Ⓙ REFLECTIVE	user selected meter
Ⓚ SHUTTER	WARN not 180°

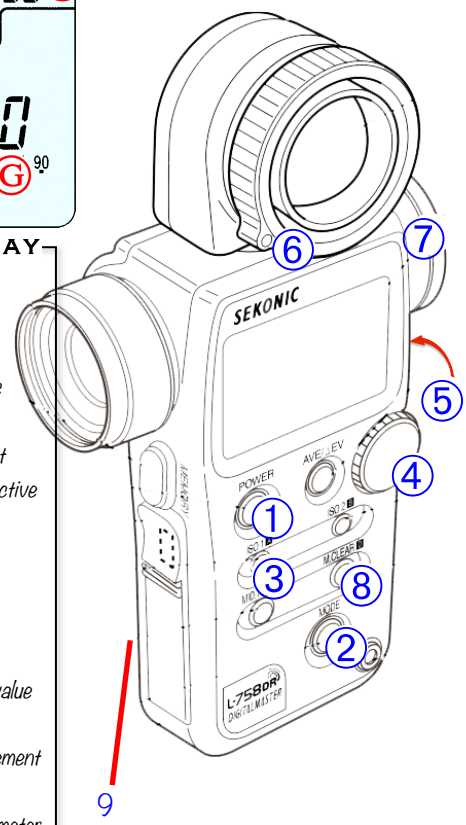

**OPERATION CONFIGURE**

- POWER on ① ▶ press/hold POWER off
- CLEAR all memory
  - ▶ press/hold MODE ② + M.CLEAR ⑧
- SET Cine Mode
  - ▶ press/hold MODE ② ▶ rotate Jog Wheel ④
  - ▶ boxed ambient icon Ⓐ · "F" **NOT** boxed Ⓑ
- SET Shutter Angle 180°
  - ▶ press/hold MODE ② + ISO 2 ▶ rotate Jog Wheel
- SET frame rate f/s 24
  - ▶ rotate Jog Wheel ④
  - if boxed "T" Ⓒ visible, rotate Jog Wheel ④ Counter-Clockwise
- SET desired ISO
  - ▶ press/hold ISO 1 ③ ▶ rotate Jog Wheel ④

**MEASURE LIGHT**

- SELECT meter ⑦ Incident or Reflective (Spot)
  - if Incident, EXTEND lumi-sphere globe ⑥
- PRESS ⑤
- aperture F-stop for NORMAL\* exposure
  - ▶ F-stop Ⓕ measured in 1/10 increments Ⓖ

Cheat on battery lid 9